













2 AXLES HOOKLIFT TRAILER ITR 10.16

ARTICULATED MECHANIC SUSPENSIONS



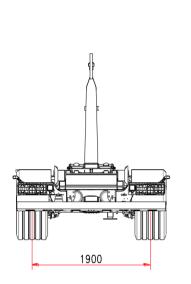

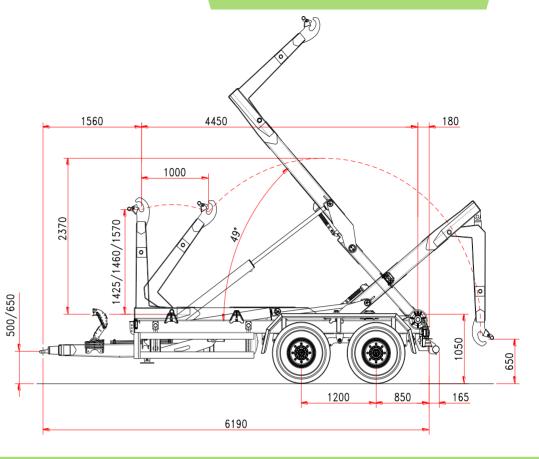

Standard Features

CHASSIS

200 x 100 mm Frame section Draw bar silent blocks Leaf spring suspension 16 t Axles wheelbase 1200 mm Axles section 2 x 100 mm **Axles** fixed + fixed Track 1900 mm Brake drums 350 x 90 mm Braking system hydraulic Towing eye turning Support foot hydraulic 500/50-17,5 Wheel size Chassis loading level 1050 mm

WEIGHT AND DIMENSION

Gross Trailer Weight (G.T.W.) 16
Container handling cap. 35
Max speed 40
(*) Tare 35

16 t 3500/5500 mm 40 km/h 3500 kg

ARTICULATED ARM

Run 1000 mm
Hook level 1425/1460/1570
Container internal/external locking hydraulic
Tipping angle 49°
Tipping capacity 10 t
Lifting capacity 10 t


OLEO-DYNAMIC SYSTEM

Tractor hydraulics	3 controls d. a.
Oil volume (hooklift filled)	30 l
Hooklift filled:	
Cylinders oil operation demand	
Tipping	6,8 l
Loading/unloading	7,4

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.





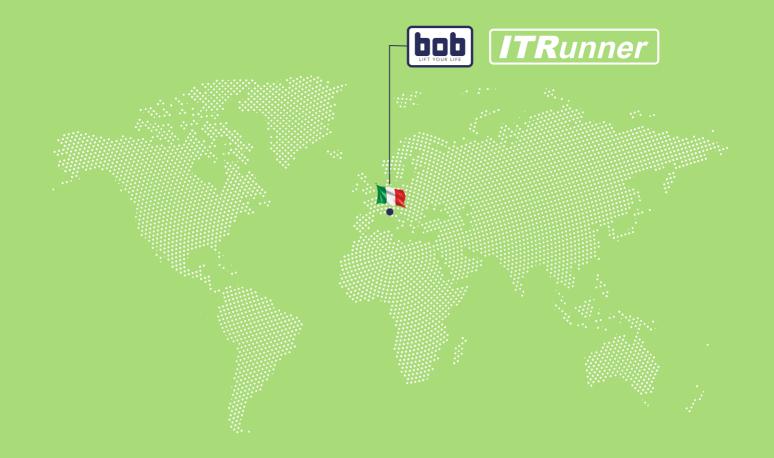

[ITRunner]

www.itrunner.it





