



ITR 26.23HD

TELESCOPIC




ITRunner



www.itrunner.it

2 AXLES HOOKLIFT ITR 26.23 HD
TELESCOPIC
HYDRAULIC SUSPENSIONS

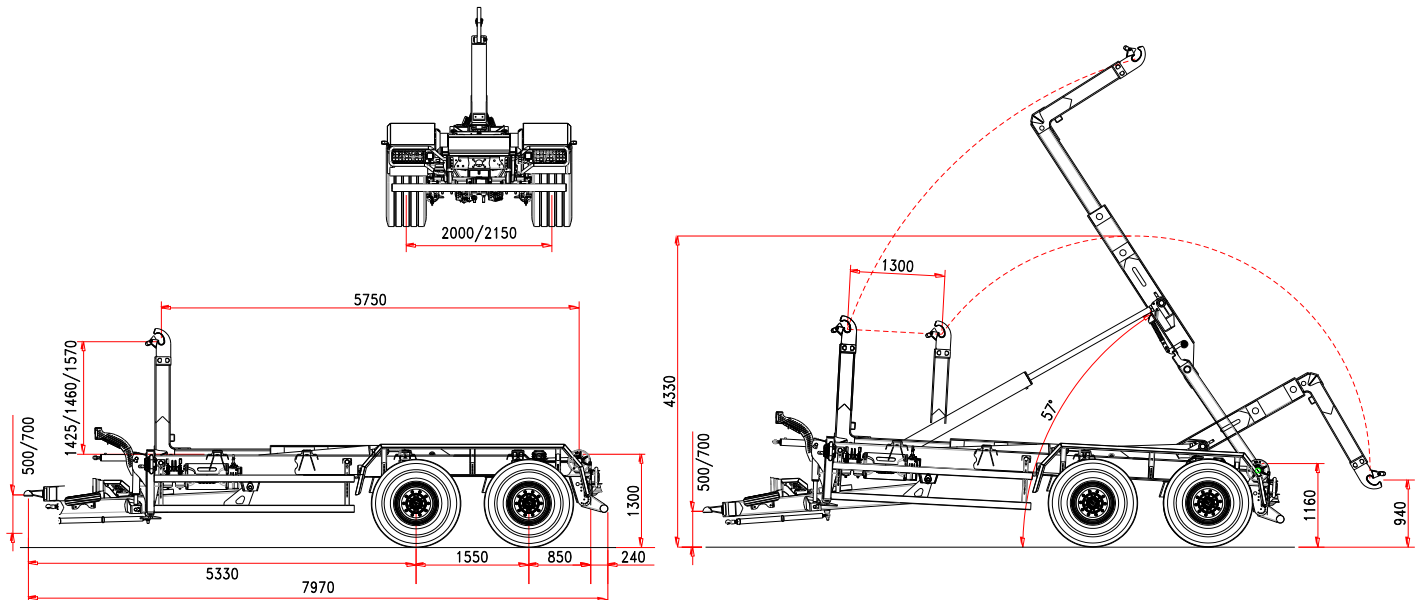

Standard Features

CHASSIS

Frame section	250 x 100 mm
Draw bar	hydraulic
Leaf spring suspension	24 t
Axles wheelbase	1550 mm
Axles section	2 x 150 mm
Axles	fixed+fixed
Track	2000 mm
Brake drums	406 x 120 mm
Braking system	hydraulic
Towing eye	turning
Support foot	2 x hydraulic
Wheel size	550/60 R22,5
Chassis loading level	1300 mm
Front stab. cilinder 3 rd point	standard

WEIGHT AND DIMENSION

Gross Trailer Weight (G.T.W.)	23 t
Container handling cap.	5000/6500 mm
Max speed	40 km/h
(*) Tare	6600 kg

TELESCOPIC ARM

Run	1300 mm
Hook level	1425/1460/1570
Container internal/external locking	hydraulic
Tipping angle	57°
Hoist start cylinder	standard
Tipping capacity	26 t
Lifting capacity	26 t
<i>(according to hook-level)</i>	

OLEO-DYNAMIC SYSTEM

Tractor hydraulics	3 controls d.a.
Trailer hydraulics:	
Cardan+piston pump	108 l/1000 rpm
Oil tank	160 l
Max pressure	320 bar
Flow control electro-hydraulics with ground manual levers and remote radio control Bobeasy	12 lt

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.

ITRunner

ITR 26.23HD
TELESCOPIC





ITRunner



ITRunner

Reg. Oltre Rea, 32
12060 Monchiero (CN) - Italy
Phone +39 0173 780 002
Fax +39 0173 780 700
Email: info@itranner.it

www.itrunner.it



lift your life