



ITR 26.23HDM

TELESCOPIC




ITRunner



www.itrunner.it

2 AXLES HOOKLIFT ITR 26.23 HDM
TELESCOPIC
MECHANIC SUSPENSIONS

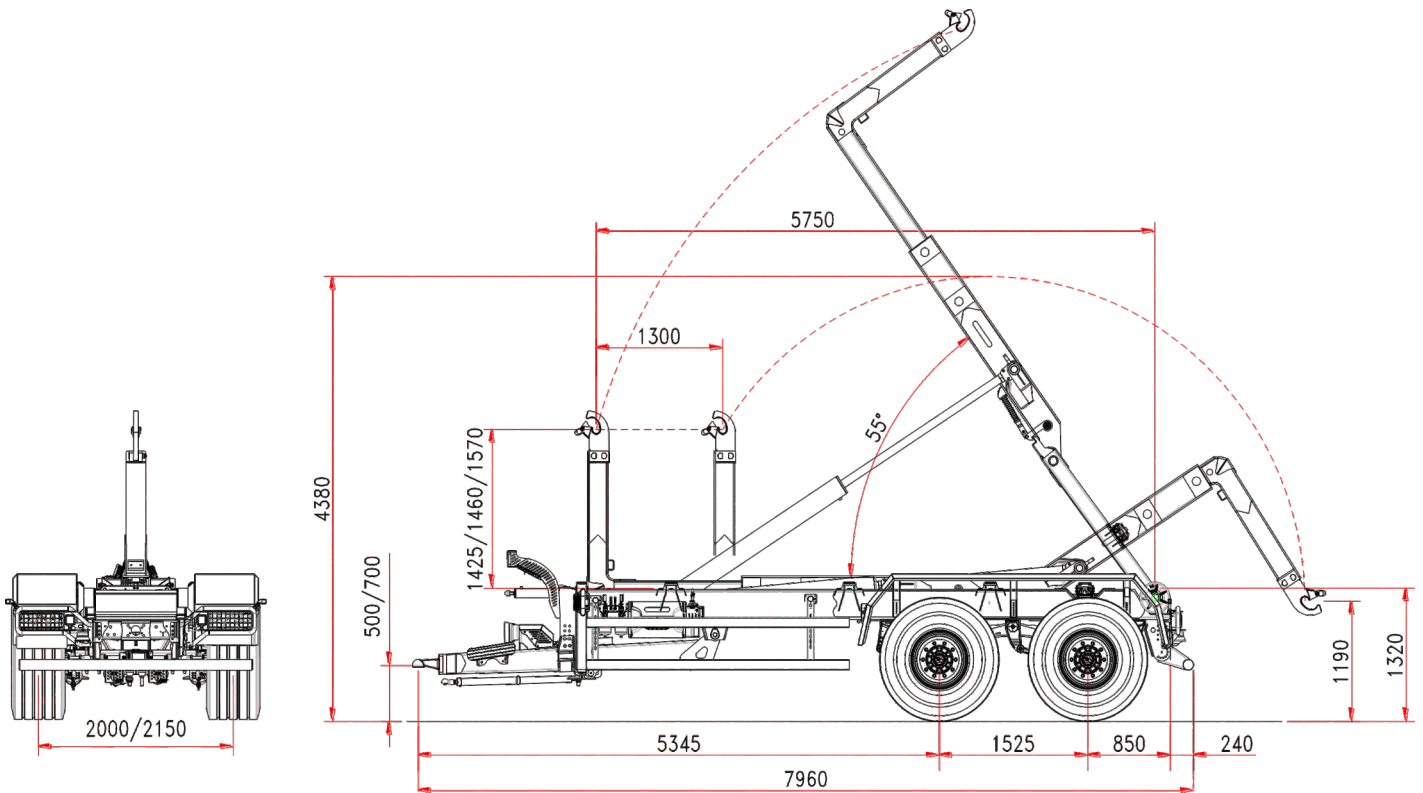

Standard Features

CHASSIS

Frame section	250 x 100 mm
Draw bar	silent block
Leaf spring suspension	tandem 24 t
Axles wheelbase	1525 mm
Axles section	2 x 150 mm
Axles	fixed+fixed
Track	2000 mm
Brake drums	406 x 120 mm
Braking system	hydraulic
Towing eye	turning
Support foot	2 x hydraulic
Wheel size	550/60 R22,5
Chassis loading level	1320 mm
Front stab. cilinder 3 rd point	standard

WEIGHT AND DIMENSION

Gross Trailer Weight (G.T.W.)	23 t
Container handling cap.	5000/6500 mm
Max speed	40 km/h
(*) Tare	6450 kg

TELESCOPIC ARM

Run	1300 mm
Hook level	1425/1460/1570
Container internal/external	hydraulic
locking	55°
Tipping angle	standard
Hoist start cylinder	26 t
Tipping capacity	26 t
Lifting capacity	

OLEO-DYNAMIC SYSTEM

Tractor hydraulics	1 controls d.d
Trailer hydraulics:	
Cardan+piston pump	108 l/1000 rpm
Oil tank	160 l
Flow control electro-hydraulics with ground manual levers and remote radio control Bobeasyl	

12 lt

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.


ITRunner

ITR 26.23HDM
TELESCOPIC





ITRunner

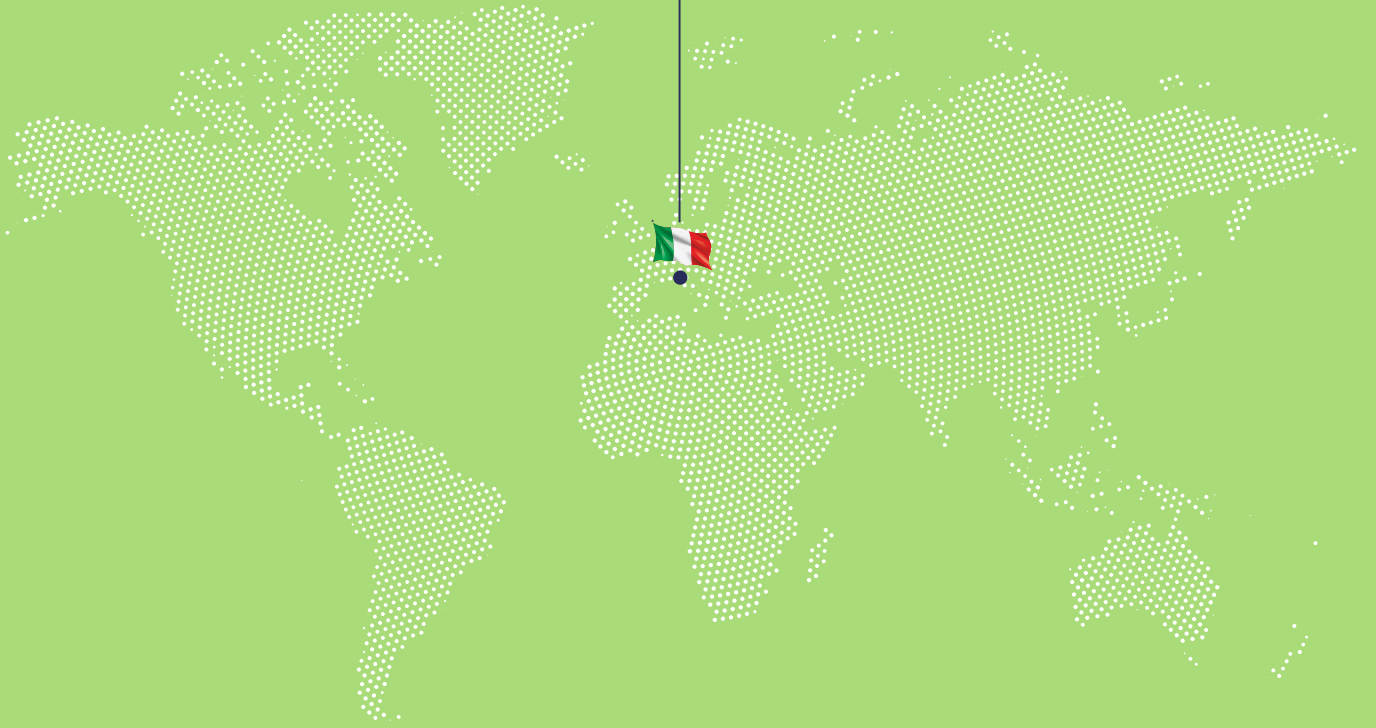

ITRunner

Reg. Oltre Rea, 32
12060 Monchiero (CN) - Italy
Phone +39 0173 780 002
Fax +39 0173 780 700
Email: info@itranner.it

www.itrunner.it



lift your life