



ITRK18.23

TELESCOPIC ARTICULATED




ITRunner



www.itrunner.it

2 AXLES HOOKLIFT ITRK 18.23 TELESCOPIC AND ARTICULATED MECHANIC SUSPENSIONS

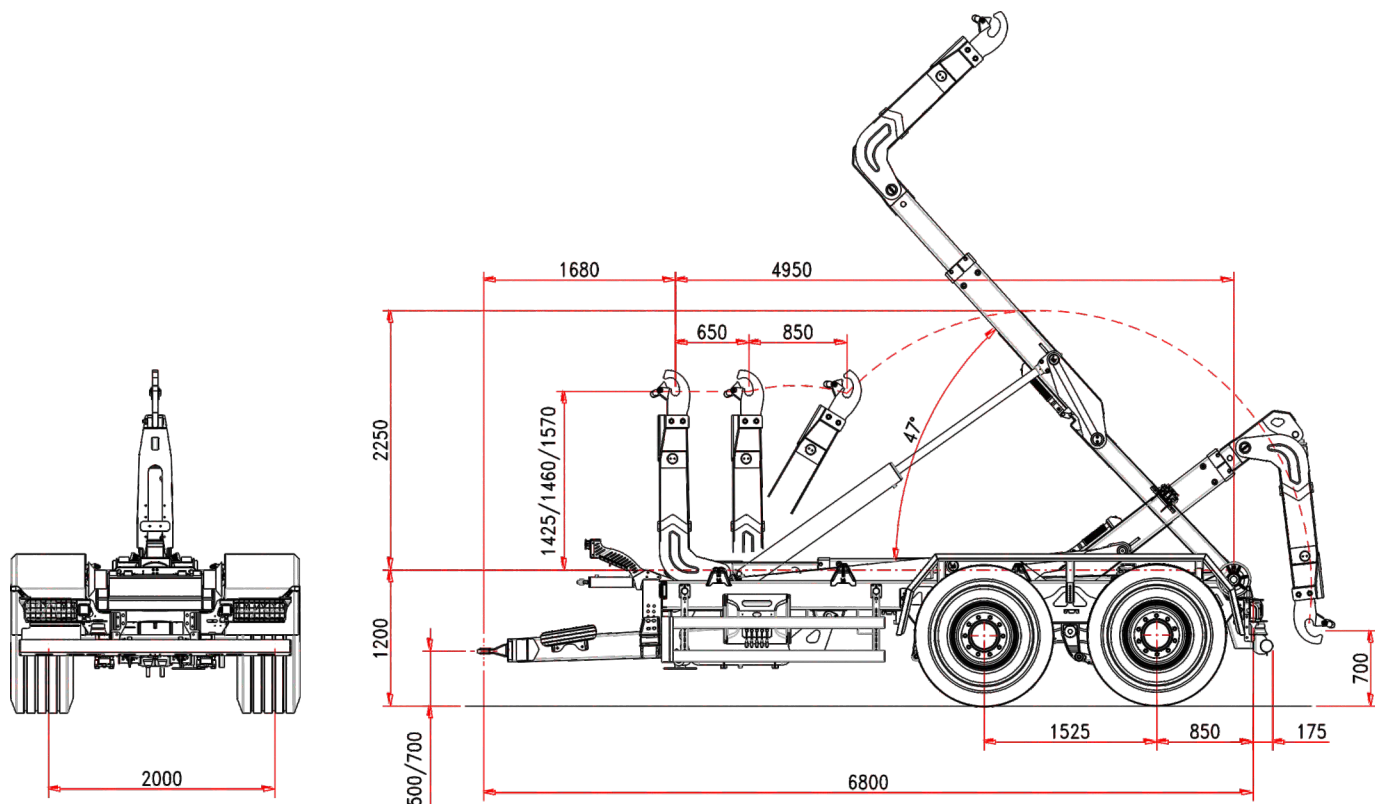

Standard Features

CHASSIS

Frame section	250 x 100 mm
Draw bar	silent blocks
Leaf spring suspension	24 t
Axles wheelbase	1525 mm
Axles section	2 x 110 mm
Axles	fixed + fixed
Track	2000 mm
Brake drums	406 x 120 mm
Braking system	hydraulic
Towing eye	turning type
Support foot	hydraulic
Wheel size	550/60 R22,5
Chassis loading level	1200 mm
Front stab. Cylinder 3 rd point	standard

WEIGHT AND DIMENSION

Gross Trailer Weight (G.T.W.)	23 t
Container handling cap.	4000/6000 mm
Max speed	40 km/h
(*) Tare	5350 kg

TELESCOPIC AND ARTICULATED ARM

Run	650 + 850 mm
Hook level	1425/1460/1570
Container internal/external locking	hydraulic
Tipping angle	47°
Hoist start cylinder	standard
Tipping capacity	18 t
Lifting capacity	18 t

OLEO-DYNAMIC SYSTEM

Tractor hydraulics	2 controls d.a.
Oil volume (hooklift filled)	46 l
Hooklift filled	
Cylinders oil operation demand:	
Tipping	11,4 l
Loading/unloading	12,7 l
Electro-valves 4 section with BOBEASY base control	

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.

ITRunner

ITRK 18.23
TELESCOPIC ARTICULATED





ITRunner



ITRunner

Reg. Oltre Rea, 32
12060 Monchiero (CN) - Italy
Phone +39 0173 780 002
Fax +39 0173 780 700
Email: info@itranner.it

www.itrunner.it



lift your life