



ITRK 26.23HD

TELESCOPIC ARTICULATED





ITRunner



www.itrunner.it

3 AXLES HOOKLIFT ITRK 26.23 HD TELESCOPIC AND ARTICULATED HYDRAULIC SUSPENSIONS

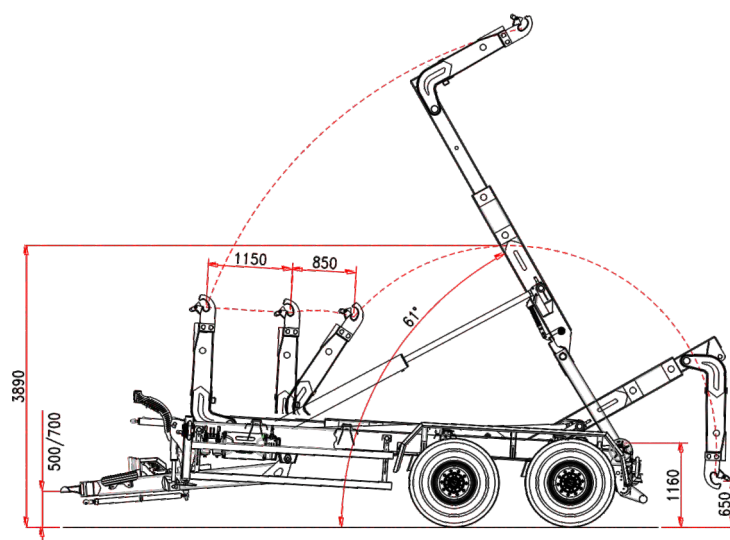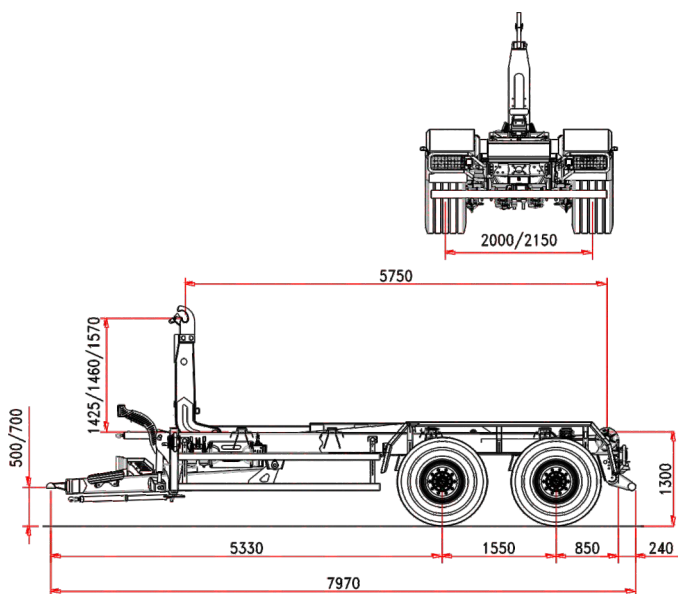

Standard Features

CHASSIS

Frame section	300 x 100 mm
Draw bar	hydraulic
Suspension hydraulic	24 t
Axles wheelbase	1550 mm
Axles section	2 x 150 mm
Axles	fixed+fixed
Track	2000 mm
Brake drums	406 x 120 mm
Braking system	hydraulic
Towing eye	turning
Support foot	2xhydraulic
Wheel size	550/60 R22,5
Chassis loading level	1300 mm
Front stab. Cylinder 3 rd point	standard

WEIGHT AND DIMENSION

Gross Trailer Weight (G.T.W.)	23 t
Container handling cap.	5000/6500 mm
Max speed	40 km/h
(*) Tare	6850 kg

TELESCOPIC AND ARTICULATED ARM

Run	1150 + 850 mm
Hook level	1425/1460/1570
Container internal/external locking	hydraulic
Tipping angle	61°
Hoist start cylinder	standard
Tipping capacity	26 t
Lifting capacity	26 t

OLEO-DYNAMIC SYSTEM

Tractor hydraulics	3 controls d.a.
Trailer hydraulics:	
Cardan + piston pump	108 l/1000 rpm
Oil tank	160 l

Flow control electro-hydraulic with ground manual levers and remote radio control Bobeasy

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.

ITRK 26.23HD

TELESCOPIC ARTICULATED





ITRunner



ITRunner

Reg. Oltre Rea, 32
12060 Monchiero (CN) - Italy
Phone +39 0173 780 002
Fax +39 0173 780 700
Email: info@itranner.it

www.itrunner.it



lift your life