



ITRK 26.33HD

TELESCOPIC ARTICULATED




ITRunner



www.itrunner.it

3 AXLES HOOKLIFT ITRK 26.33 HD TELESCOPIC AND ARTICULATED HYDRAULIC SUSPENSIONS

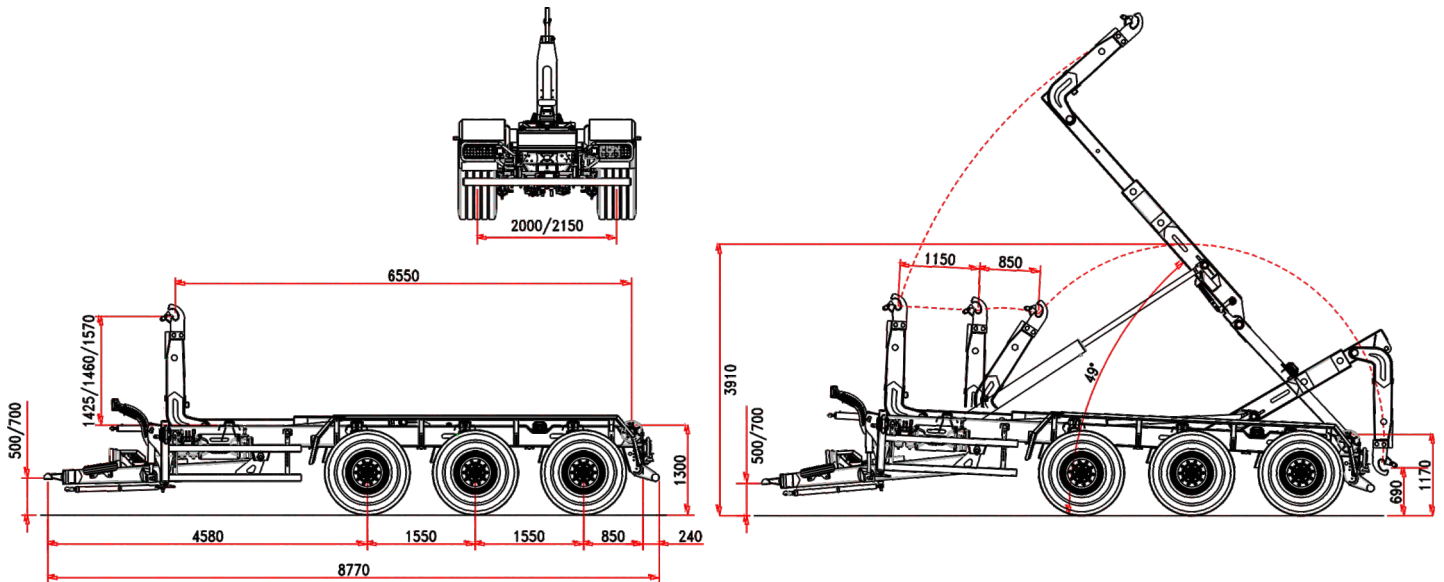

Standard Features

CHASSIS

| | |
|--|-------------------|
| Frame section | 250 x 100 mm |
| Draw bar | hydraulic |
| Suspension hydraulic | 33 t |
| Axles wheelbase | 1550 mm |
| Axles section | 3 x 150 mm |
| Axles | fixed+fixed+fixed |
| Track | 2000 mm |
| Brake drums | 406 x 120 mm |
| Braking system | hydraulic |
| Towing eye | turning |
| Support foot | 2xhydraulic |
| Wheel size | 550/60 R22,5 |
| Chassis loading level | 1300 mm |
| Front stab. Cylinder 3 rd point | standard |

WEIGHT AND DIMENSION

| | |
|-------------------------------|--------------|
| Gross Trailer Weight (G.T.W.) | 33 t |
| Container handling cap. | 5000/7500 mm |
| Max speed | 40 km/h |
| (*) Tare | 7950 kg |

TELESCOPIC AND ARTICULATED ARM

| | |
|-------------------------------------|----------------|
| Run | 1150 + 850 mm |
| Hook level | 1425/1460/1570 |
| Container internal/external locking | hydraulic |
| Tipping angle | 49° |
| Hoist start cylinder | standard |
| Tipping capacity | 26 t |
| Lifting capacity | 26 t |

OLEO-DYNAMIC SYSTEM

| | |
|---|-----------------|
| Tractor hydraulics | 3 controls d.a. |
| Trailer hydraulics: | |
| Cardan + piston pump | 108 l/1000 rpm |
| Oil tank | 160 l |
| Flow control electro-hydraulic with ground manual levers and remote radio control Bobeasy | |

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.


ITRunner

ITRK 26.33HD





ITRunner

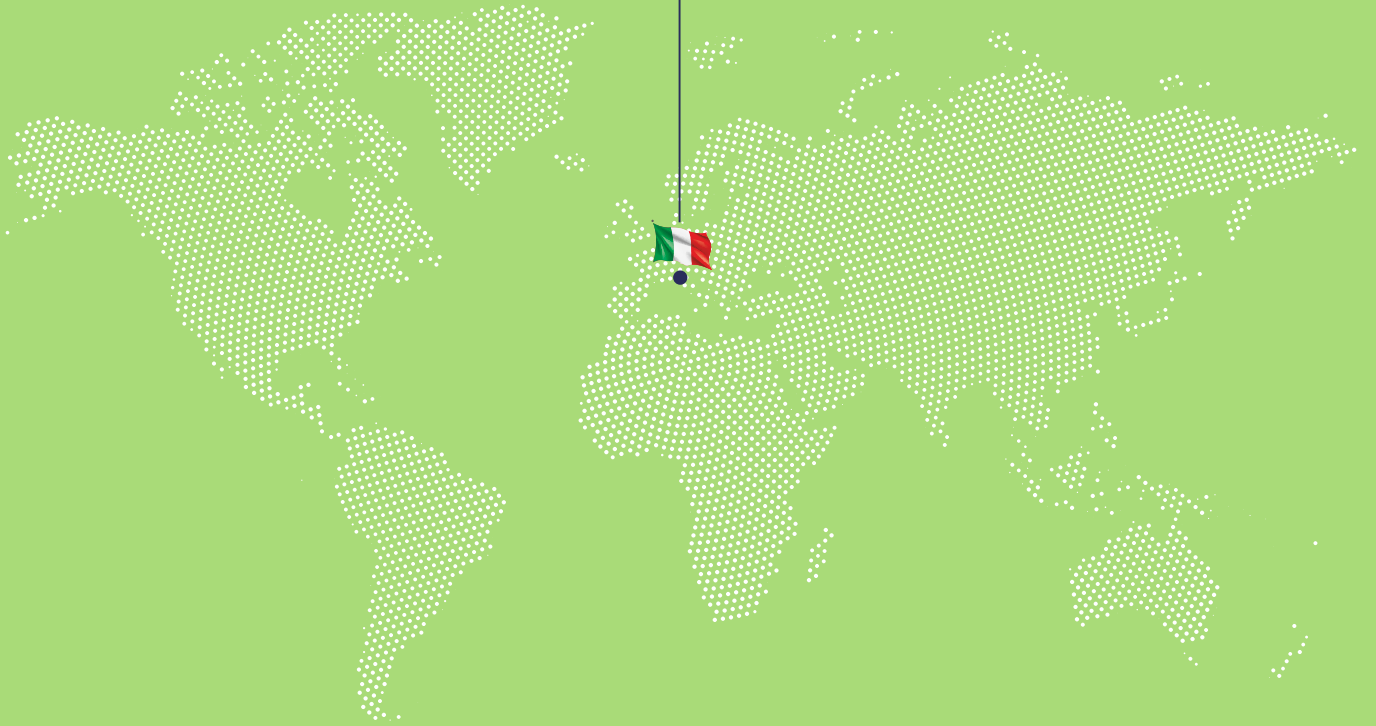

ITRunner

Reg. Oltre Rea, 32
12060 Monchiero (CN) - Italy
Phone +39 0173 780 002
Fax +39 0173 780 700
Email: info@itranner.it

www.itrunner.it



lift your life