














ITRK30.34HD

3 AXLES HOOKLIFT ITRK 30.34 HD TELESCOPIC AND ARTICULATED HYDRAULIC SUSPENSIONS

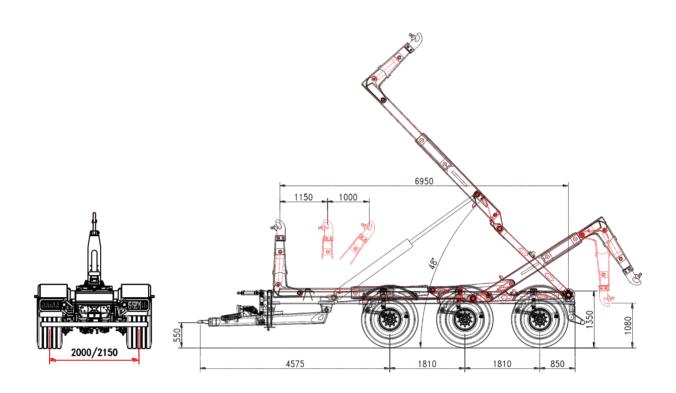

Standard Features

CHASSIS

Frame section 300 x 100 mm Draw bar hydraulic Suspension hydraulic 36 t Axles wheelbase 1810 mm Axles section 3 x 150 mm **Axles** fixed+fixed+fixed Track 2000 mm Brake drums 406 x 120 Braking system hydraulic Towing eye turning Support foot 2xhydraulic Wheel size 550/60 R22.5 Chassis loading level 1350 mm Front stab. Cylinder 3rd point standard

WEIGHT AND DIMENSION

Gross Trailer Weight (G.T.W.)

Container handling cap.

Max speed

(*) Tare

33/34 t

5500/8200 mm

40 km/h

8600 kg

TELESCOPIC AND ARTICULATED ARM

Run 1150 + 1000 mm
Hook level 1425/1460/1570
Container internal/external locking hydraulic
Tipping angle 48°
Hoist start cylinder standard
Tipping capacity 30 t
Lifting capacity 30 t

OLEO-DYNAMIC SYSTEM

Tractor hydraulics

Trailer hydraulics:

Cardan + piston pump

Oil tank


Flow control electro-hydraulic with ground manual levers and remote radio control Bobeasy

(*) Tare: the trailer weight is referred to the basic unit without options and accessories.



2 controls d.a.



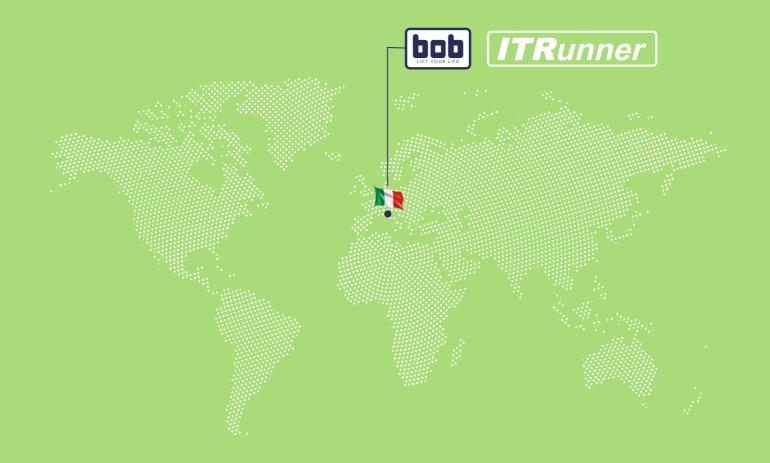

[ITRunner]

www.itrunner.it





